

DBR-200

Operation:

- Supply voltage max. 18V, connect input to the input terminals.
- Supply voltage 18-24V, cut link wire (1), connect input to the input terminals.
- Supply voltage 24-30V, cut link wires (1) and (2), connect input to the input terminals.

Supply voltage:
8-30VAC or 11-30VDC


Power consumption:
45mA @ 12VDC

Relay rated: 5A

Dimensions:
67 x 50 x 35mm

Connectors: max. 2,5mm²

Contacts: 2pcs change-over
(NO, NC, C)

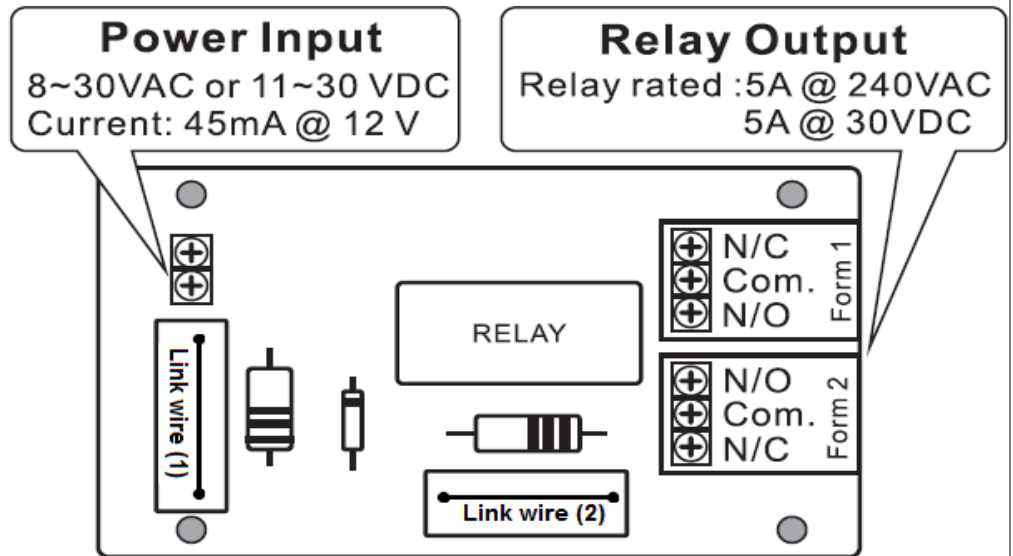

www.nerival.fi

sales@nerival.fi

Nerival Oy

DBR-200

Toiminta:

- Syöttöjännite max 18V, kytke syöttö input liittimiin.
- Syöttöjännite 18-24V, katkaise kirkas johdinlenkki (1), kytke syöttö input liittimiin.
- Syöttöjännite 24-30V, katkaise kirkkat johdinlenkit (1) ja (2), kytke syöttö input liittimiin.

Syöttöjännite:
8-30VAC tai 11-30VDC


Virrankulutus:
45mA @ 12VDC

Koskettimen
virrankesto: 5A

Mitat: 67 x 50 x 35mm

Liittimet: max. 2,5mm²

Koskettimia: 2kpl vaihto
(NO, NC, C)

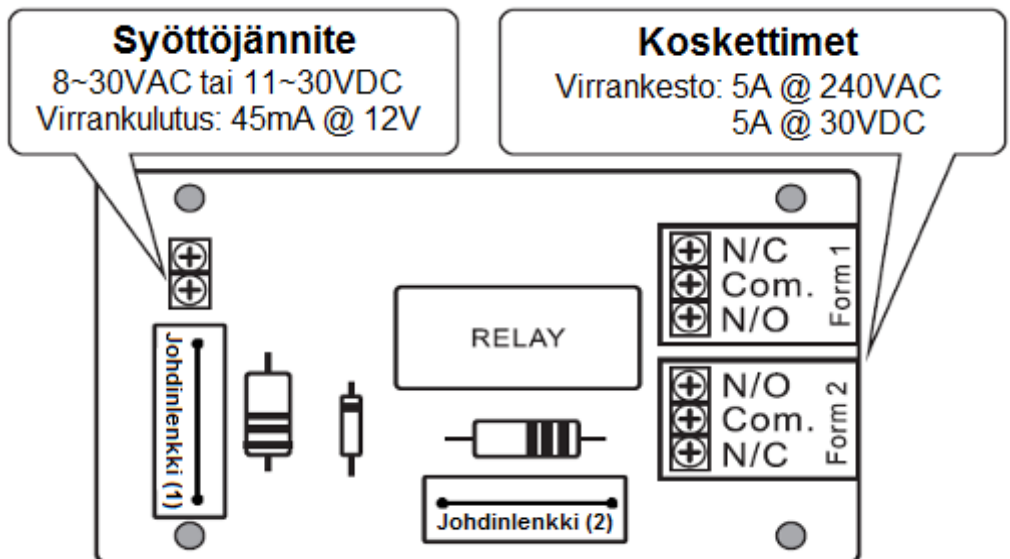

www.nerival.fi

sales@nerival.fi

Nerival Oy