



**PSM-B1A12VBZ**  
**AC/DC-DC**  
**Adaptor+Buzzer**

Input: 12-24VAC or 12-24VDC  
 Output: 12VDC 1A  
 Efficiency: 80%  
 Line regulations: 4%  
 Load regulations: 3,5%  
 Dimensions: 59 x 23,5 x 23,6mm (L x W x D)  
 Output indicator: Red LED indicator  
 Output overload and short circuit protection.  
 Buzzer volume: 80db, can be turned on/off easily by jumper.

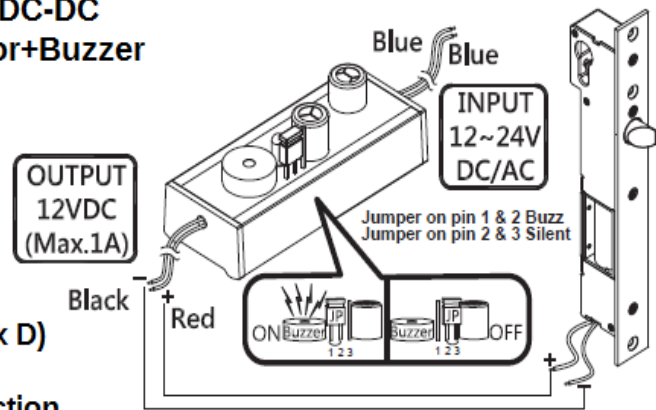


\*We recommend using at least a 16VAC/DC transformer for devices that require 1.0A.  
 \*AC transformers should range from 12 to 24VAC, and DC power supplies from 14-24VDC

Nerival Oy  
 PL 31  
 02361 Espoo  
 www.nerival.fi

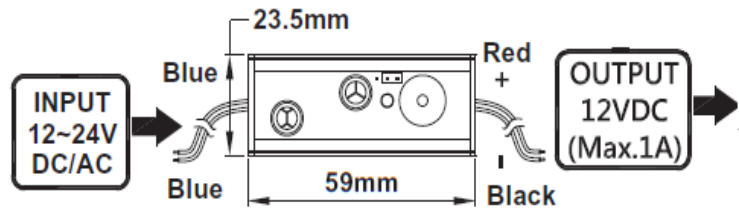

**PSM-B1A12VBZ**  
**AC/DC-DC**  
**Adaptor+Buzzer**

Input: 12-24VAC or 12-24VDC  
 Output: 12VDC 1A  
 Efficiency: 80%  
 Line regulations: 4%  
 Load regulations: 3,5%  
 Dimensions: 59 x 23,5 x 23,6mm (L x W x D)  
 Output indicator: Red LED indicator  
 Output overload and short circuit protection.  
 Buzzer volume: 80db, can be turned on/off easily by jumper.

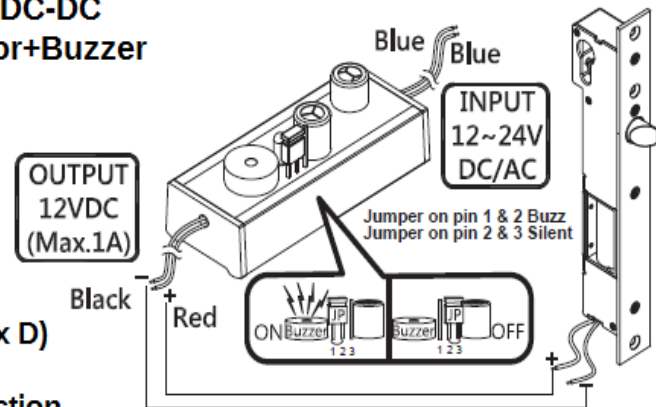

\*We recommend using at least a 16VAC/DC transformer for devices that require 1.0A.  
 \*AC transformers should range from 12 to 24VAC, and DC power supplies from 14-24VDC

Nerival Oy  
 PL 31  
 02361 Espoo  
 www.nerival.fi

